1488

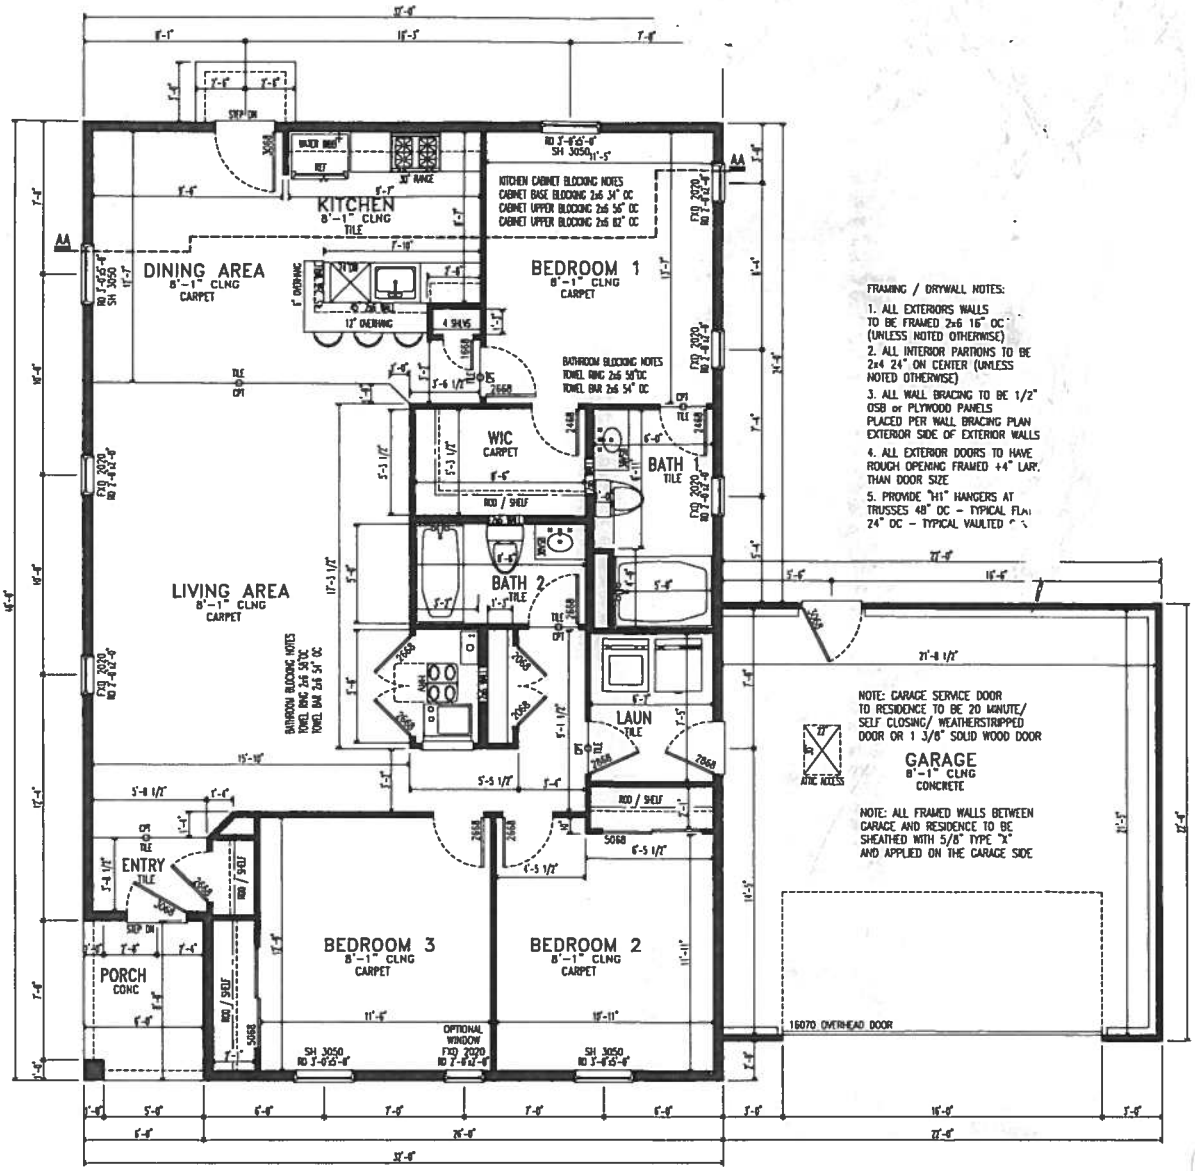

FRAMING / DRYWALL NOTES:

1. ALL EXTERIORS WALLS TO BE FRAMED 2x6 16" OC (UNLESS NOTED OTHERWISE)
2. ALL INTERIOR PARTIONS TO BE 2x4 24" ON CENTER (UNLESS NOTED OTHERWISE)
3. ALL WALL BRACING TO BE 1/2" OSB or PLYWOOD PANELS PLACED PER WALL BRACING PLAN EXTERIOR SIDE OF EXTERIOR WALLS
4. ALL EXTERIOR DOORS TO HAVE ROUGH OPENING FRAMED +4" LARGER THAN DOOR SIZE
5. PROVIDE "H1" HANGERS AT TRUSSES 48" OC – TYPICAL FLAT 24" OC – TYPICAL VAULTED

NOTE: GARAGE SERVICE DOOR TO RESIDENCE TO BE 20 MINUTE/ SELF CLOSING/ WEATHERSTRIPPED DOOR OR 1 3/8" SOLID WOOD DOOR

NOTE: ALL FRAMED WALLS BETWEEN GARAGE AND RESIDENCE TO BE SHEATHED WITH 5/8" TYPE "X" AND APPLIED ON THE GARAGE SIDE

1 FLOOR PLAN

SCALE 1/4"=1'-0"

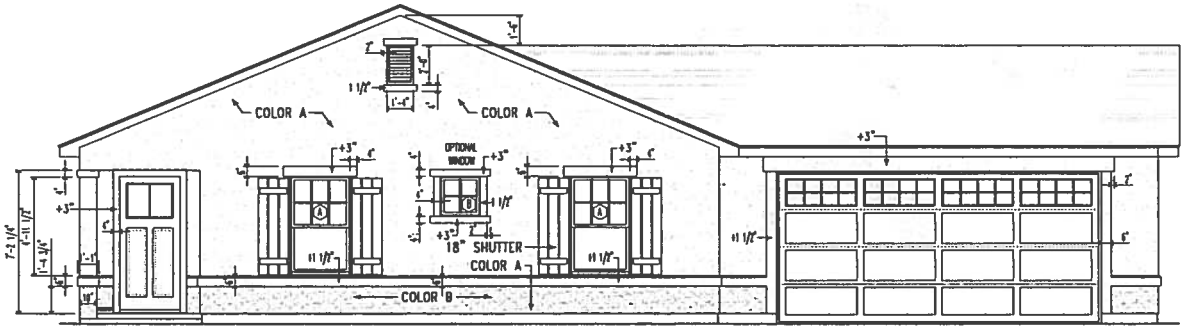

2 FRONT ELEVATION

SCALE 1/4"=1'-0"

PALO DURO HOME
4420 TOWER ROAD SW ALBUQUERQUE NM 87121

PLAN # PD 1488
1488 SQUARE FEET

FLOOR PLAN and BUILDING ELEVATIONS

SCALE AS NOTED

A-1